


Features

- Pure sine wave output
- Smart LCD setting (Working modes, Charge Current, Charge Voltage, etc).
- Built in MPPT 60A/80A solar charge controller
- Combining solar system, AC utility, and battery power source to supply continuous power
- Overload, short circuit and Deep discharge protection
- Cold start function
- Support USB, RS485 monitoring function
- WIFI remote monitoring (optional)
- Compatible to generator
- Support parallel operation up to 3 units (available for 3KW-5KW 48V)


Introduction

This is a multi-function inverter/charger, combining functions of inverter, MPPT 60A/80A solar charger and battery charger to offer uninterruptible power support with portable size. Its comprehensive LCD display offers user-configurable and easy-accessible button operation such as battery charging current, AC/solar charger priority, and acceptable input voltage based on different applications.


Back panel printing description

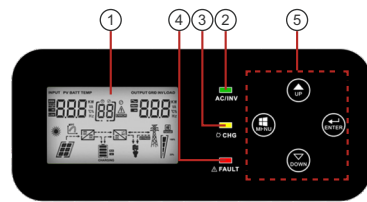

1. LCD Display
2. Status Indicator
3. Charging Indicator
4. Fault Indicator
5. Function Buttons

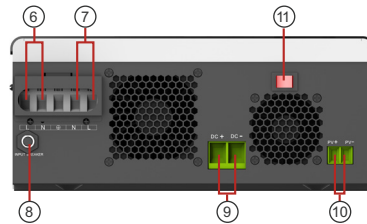


6. AC input
7. AC output
8. Circuit breaker
9. Battery input
10. PV input
11. Power on/off switch
12. RS-485 Communication port
13. USB
14. Dry contact
15. USB wifi

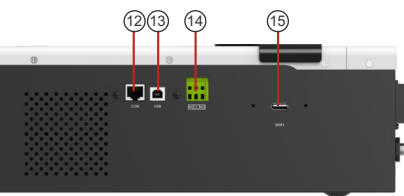

AM24V-4KVA PV

Solar system connection

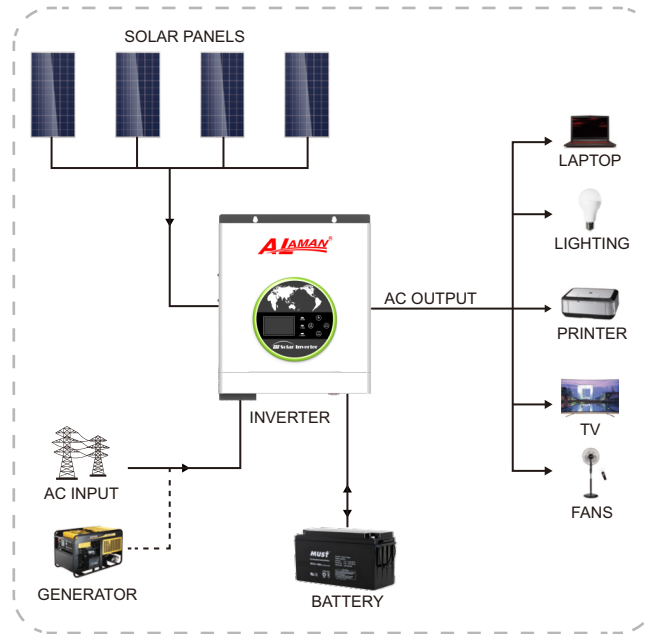

Specification

MODEL		AM12V-1400VA PV	AM24V-4KVA PV
Default Battery System Voltage		12VDC	24VDC
INVERTER OUTPUT	Rated Power	1000VA / 1000W	3000VA / 3000W
	Surge Power	2000VA	6000VA
	Waveform	Pure sine wave	
	AC Voltage Regulation (Batt.Mode)	220VAC~240VAC(Setting)	
	Inverter Efficiency(Peak)	90%~93%	
	Transfer Time	10ms(UPS / VDE4105) / 20ms(APL)	
AC INPUT	Voltage	230VAC	
	Selectable Voltage Range	170~280VAC(UPS) / 90~280VAC(APL) / 184~253VAC(VDE)	
	Frequency Range	50Hz / 60Hz (Auto sensing)	
BATTERY	Normal voltage	12VDC	24VDC
	Floating Charge Voltage	13.7VDC	27.4VDC
	Overcharge Protection	15VDC	30VDC
SOLAR CHARGER & AC CHARGER	Maximum PV Array Open Circuit Voltage	105VDC	145VDC
	PV Array MPPT Voltage Range	15~105VDC	30~120VDC
	Standby Power Consumption	2W	
	Maximum PV Array Power	720W	1500W
	Maximum Solar Charge Current	60A	
	Maximum Efficiency	98%	
	Maximum AC Charge Current	10A or 20A	20A or 30A
	Maximum Charge Current	70A	80A
MECHANICAL SPECIFICATIONS	Machine Dimension (W*H*D)	224*337*98mm	290*342*125mm
	Package Dimension (W*H*D)	/	/
	G.W (kg)	/	/
	N.W (kg)	/	/
OTHER	Humidity	5% to 95% Relative Humidity (Non-condensing)	
	Operating Temperature	0°C~50°C	
	Storage Temperature	-15°C - 60°C	